




Auri

AURI 3-SET 3W/830 110D WH

Downlight

The Airam AURI LED downlights deliver pure white light and they are very easy to install. The pack includes three plastic-body LED luminaires and a safe 24 V LED driver as well as accessories for surface mounting and recessed installation. For recessed installation, the decorative collar with the cable through-holes has to be removed. The 1.5 m cord has a Europlug. The connecting cords are 1 m in length. The Auris are a versatile choice for interior lighting. They can be used for local lighting in an open cabinet, between the countertop and cabinet or inside a cupboard.

Auri Downlight set 9W 3000K Beam angle Extreme wide beam $>80^\circ$; No dim; IP20; Protection cl. III; L70B50 25000h; LED not exchangeable; CRI >80 ; Housing Plastic; Colour wh; Cover Plastic, transparent

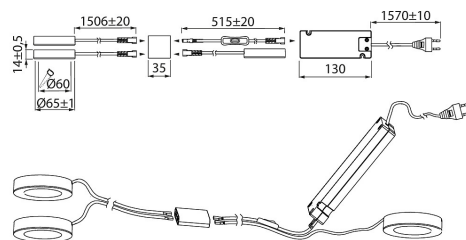

AURI 3-SET 3W/830 110D WH

PRODUCT CODE	CODE	KG	PRODUCT FAMILY
4126289	A1AIAB		Auri

AURI 3-SET 3W/830 110D WH

EC001744

Mounting	
Suitable for surface mounting	Yes
Suitable for recessed mounting	Yes
Suitable for wall mounting	No
Suitable for suspended mounting	No
Suitable for traverse mounting	No
Suitable for pedestal/floor mounting	No
Suitable for light-track mounting	No
Suitable for clamp-mounting	No
Suitable for low voltage cable system	No
Degree of protection (IP)	IP20
Luminaire with limited surface temperature, class "D" in acc. with EN 60598-2-24	No
Fit for workplace acc. EN 12464-1	No
Luminaire may be covered with thermally insulating material	No

Structure	
Adjustability	Not adjustable
Lamp type	LED not exchangeable
With lamp	Yes
Suitable for number of lamps	3
Lamp holder	Other
Housing material	Plastic
Housing colour	White
Cover material	Plastic, transparent
Surface brushed	No
Energy efficiency class of light source according to EU regulation 2019/2015	G
Emergency power supply integrated	No

Dimming and control	
With movement sensor	No
With light sensor	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI-2	No
Dimming DALI	No
Dimming DMX	No
Dimming DSI	No
Dimming potentiometer (integrated)	No
Dimming LineSwitch	No
Dimming manufacturer's proprietary system	No
Dimming mains voltage modulation	No
Dimming phase cut-off	No
Dimming phase cut-on	No
Dimming programmable	No
Dimming RF	No
Dimming Sine Wave Reduction	No
Dimming Touch and Dim	No
Dimming Zigbee	No
Dimming with push-button	No
No dimming function	Yes
IFTTT support available	No
Compatible with Apple HomeKit	No
Compatible with Google Assistant	No
Compatible with Amazon Alexa	No

Photometric data	
Beam angle	Extreme wide beam >80°
Colour of light (alphanumeric)	White
Colour temperature (min) [K]	3000
Colour temperature (max) [K]	3000
Colour rendering index CRI	80-89
Colour temperature switchable	No
Lumen setting adjustable	No
Beam angle adjustable	No
Colour consistency (McAdam ellipse)	SDCM6

Lifetime and capacity	
Rated life time L70/B50 at 25 °C (h)	25000
Rated ambient temperature acc. IEC62722-2-1 (min) [°C]	-5
Rated ambient temperature acc. IEC62722-2-1 (max) [°C]	35

Measurements	
Width (mm)	65
Height/depth (mm)	14
Length (mm)	65
Outer diameter (mm)	65
Built-in width (mm)	60
Built-in length (mm)	60
Recess diameter (min) (mm)	60
Recess diameter (max) (mm)	60

Electrotechnical data	
Voltage type	AC
Nominal voltage (min) [V]	220
Nominal voltage (max) [V]	240
Protection class	III
Suitable for lamp power (min) [W]	3
Suitable for lamp power (max) [W]	3
Maximum system power [W]	9