





# Fly

## FLY D/I 63W/840 SI

This elegant office luminaire is suitable for suspension mounting and provides evenness in up- and down-lighting. Light distribution is realised with the side panels on either side of the body. Integrated LED.

Fly Suspension luminaire 63W 4000K 5800lm No dim; IP20; Protection cl. I; L70B50 100000h; LED not exchangeable; CRI>80; SDCM3; Suitable for through wiring; 3x2.5mm<sup>2</sup>; Housing Steel; Colour sil; Cover Plastic, transparent

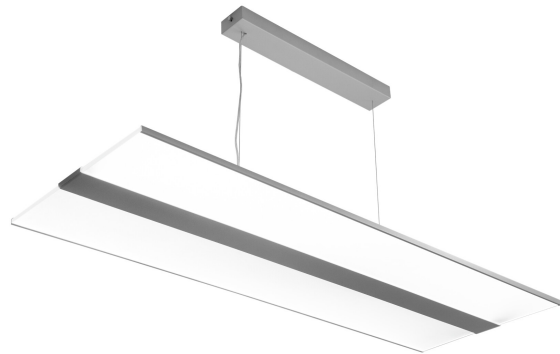

### FLY D/I 63W/840 SI

PRODUCT CODE	CODE	KG	PRODUCT FAMILY
4209588	D2FYBC	Fly	

Mounting	
Suitable for light line configuration	No
Fit for workplace acc. EN 12464-1	No
Max. number of luminaires per miniature circuit breaker B16	13
Max. number of luminaires per miniature circuit breaker C16	22
Degree of protection (IP)	IP20
Luminaire with limited surface temperature, class "D" in acc. with EN 60598-2-24	No
Suitable for emergency lighting	No
Type of wiring	Suitable for through wiring
Number of poles	3
Conductor cross section (mm²)	2.5
Quantity of luminaires for MCB C16:	22
Quantity of luminaires for MCB B16:	13

Structure	
Lamp type	LED not exchangeable
With lamp	Yes
Suitable for number of lamps	1
Lamp holder	Other
Housing material	Steel
Housing colour	Silver
Cover material	Plastic, transparent
Control gear included	Yes
Exchangeable control gear	Yes
Energy efficiency class of light source according to EU regulation 2019/2015	B
Emergency power supply integrated	No
Suspension supplied with the product	Yes
Pendant length (min) (mm)	1.5
Pendant length (max) (mm)	1.5

Dimming and control	
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming DALI-2	No
Dimming DMX	No
Dimming programmable	No
Dimming DSI	No
Dimming RF	No
Dimming potentiometer (integrated)	No
Dimming LineSwitch	No
Dimming manufacturer's proprietary system	No
Dimming mains voltage modulation	No
Dimming phase cut-off	No
Dimming phase cut-on	No
Dimming Sine Wave Reduction	No
Dimming Touch and Dim	No
Dimming Zigbee	No
Dimming with push-button	No
No dimming function	Yes
Constant luminous flux control	No
Compatible with Apple HomeKit	No
Compatible with Google Assistant	No
Compatible with Amazon Alexa	No
IFTTT support available	No
Bluetooth operated	No

Photometric data	
Light sharing	Symmetric
Colour consistency (McAdam ellipse)	SDCM3
Light outlet	Direct/indirect
Effective luminous flux (lm)	5800
Colour of light (alphanumeric)	White
Colour temperature (min) (K)	4000
Colour temperature (max) (K)	4000
Colour rendering index CRI	80-89
Colour temperature switchable	No
Lumen setting adjustable	No
Beam angle adjustable	No

Lifetime and capacity	
Rated life time L70/B50 at 25 °C (h)	100000

Measurements	
Width (mm)	445
Height/depth (mm)	10
Length (mm)	1220

Electrotechnical data	
Voltage type	AC
Nominal voltage (min) (V)	220
Nominal voltage (max) (V)	240
Type of control gear	LED operating device current-controlled
Protection class	I
Suitable for lamp power (min) (W)	63
Suitable for lamp power (max) (W)	63
Maximum system power (W)	63
Luminaire efficacy (lm/W)	92