



-O-
3 x 2,5

IP23



IP20
IP23

Lucca


IP23 GU10 WH

Lucca Downlight No dim; IP23; Protection cl. II; LED exchangeable; Suitable for through wiring; 3x2.5mm²; Housing al; Colour wh; C16 max. 138



IP23 GU10 WH

PRODUCT CODE	CODE	KG	PRODUCT FAMILY
4222782	A2WAB	0.164	Lucca

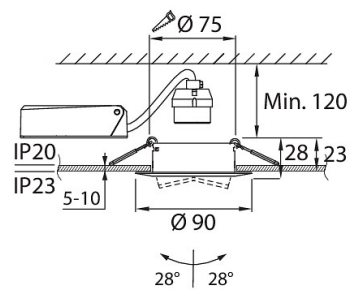

Mounting	
Suitable for surface mounting	No
Suitable for recessed mounting	Yes
Suitable for wall mounting	No
Suitable for suspended mounting	No
Suitable for ceiling mounting	Yes
Suitable for traverse mounting	No
Suitable for pedestal/floor mounting	No
Suitable for light-track mounting	No
Suitable for clamp-mounting	No
Suitable for low voltage cable system	No
Degree of protection (IP)	IP23
Type of wiring	Suitable for through wiring
Number of poles	3
Conductor cross section (mm ²)	2.5
Connection type	Screwless terminal
Luminaire with limited surface temperature, class "D" in acc. with EN 60598-2-24	No
Max. number of luminaires per miniature circuit breaker B16	92
Max. number of luminaires per miniature circuit breaker C16	138
Fit for workplace acc. EN 12464-1	No
Luminaire may be covered with thermally insulating material	No
Quantity of luminaires for MCB C16:	138
Quantity of luminaires for MCB C10:	86
Quantity of luminaires for MCB B16:	92
Quantity of luminaires for MCB B10:	57

Structure	
Adjustability	Swivelling
Lamp type	LED exchangeable
Light source included	No
Suitable for number of lamps	1
Lamp holder	GU10
Housing material	Aluminium
Surface protection	Powder coating
Housing colour	White
Surface brushed	No
Energy efficiency class of light source according to EU regulation 2019/2015	Not required
Emergency power supply integrated	No

Dimming and control	
With movement sensor	No
With light sensor	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI-2	No
Dimming DALI	No
Dimming DMX	No
Dimming DSI	No
Dimming potentiometer (integrated)	No
Dimming LineSwitch	No
Dimming manufacturer's proprietary system	No
Dimming mains voltage modulation	No
Dimming trailing edge	No
Dimming leading edge	No
Dimming programmable	No
Dimming RF	No
Dimming Sine Wave Reduction	No
Dimming Touch and Dim	No
Dimming Zigbee	No
Dimming with push-button	No
No dimming function	Yes
Constant luminous flux control	No
IFTTT support available	No
Compatible with Apple HomeKit	No
Compatible with Google Assistant	No
Compatible with Amazon Alexa	No

Photometric data	
Light outlet	Direct
Colour temperature switchable	No
Lumen setting adjustable	No
Beam angle adjustable	No

Lifetime and capacity	
Measurements	
Length (mm)	95
Width (mm)	95
Height/depth (mm)	93
Outer diameter (mm)	95
Recess diameter (min) (mm)	75
Recess diameter (max) (mm)	75

Electrotechnical data	
Voltage type	AC
Nominal voltage (min) [V]	220
Nominal voltage (max) [V]	240
Type of control gear	Not required
Protection class according to IEC 61140	II
Suitable for lamp power (min) [W]	8
Suitable for lamp power (max) [W]	8