


SmartHome

FIL 4.9W 15000h BX

Beautiful decorative lamps

The elegant and decorative Airam SmartHome Amber CCT LED lamps are so visually striking that they do not necessarily require a lampshade. The LED filaments are shaped in a spiral design, and the glass has an antique-tinted finish. Easily adjust the colour temperature from very warm to warm white (1800–3000 K) using your mobile device. The lamps can also be switched on and off using a standard wall switch, while the last used lighting setting is stored in the lamp's memory. Airam SmartHome smart products are controlled via the Airam SmartHome app. Download the free app from the App Store or Google Play. Connect the devices directly to your home WiFi network – no separate hub is required. The products can also be connected to voice control via Google Assistant, Amazon Alexa or Siri Shortcuts.

SmartHome clear Edison bulb CCT WiFi filament LED lamp 4.9W 1800-3000K E27 350lm 15000h 64x142mm, colour Amber, cardboard packing. Supply frequency ~50/60Hz.

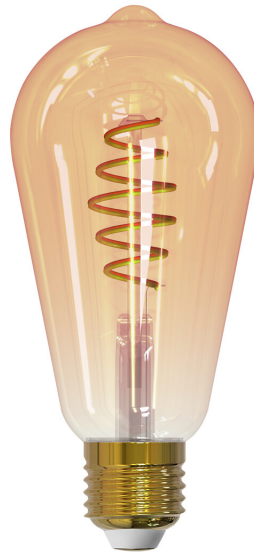

FIL 4.9W 15000h BX

PRODUCT CODE	CODE	KG	PRODUCT FAMILY
4713892	A7GAJO	0.05	SmartHome

FIL 4.9W 15000h BX

EC001959

Mounting	
Degree of protection (IP)	IP20

Structure	
Colour	Amber
Housing colour	Colourless

Dimming and control	
Dimming trailing edge	No
Dimming leading edge	No
Dimming Touch and Dim	No
Dimming Zigbee	No
Dimming Bluetooth	No
Dimming Wi-Fi	Yes
No dimming function	No
Remote operation possible	Yes
With movement sensor	No
With remote control	Yes
With twilight switch	No
Compatible with Apple HomeKit	No
Compatible with Google Assistant	Yes
Compatible with Amazon Alexa	Yes
IFTTT support available	No

Photometric data	
Luminous flux (min) (lm)	350
Luminous flux (max) (lm)	350
Colour rendering index (CRI/Ra)	80-89
Colour of light acc. EN 12464-1	Warm <3300 K
Colour temperature (min) (K)	1800
Colour temperature (max) (K)	3000
Beam angle (min) (°)	320
Beam angle (max) (°)	320
Colour consistency (McAdam ellipse)	SDCM6
Photobiological safety according to EN 62471	RG1

Lifetime and capacity	
------------------------------	--

Measurements	
Diameter (mm)	64
Length (mm)	142

Electrotechnical data	
Nominal voltage (min) (V)	220
Nominal voltage (max) (V)	240
Nominal current (min) (mA)	47
Nominal current (max) (mA)	47
Power factor	0.5
Lamp power (min) (W)	4.9
Lamp power (max) (W)	4.9
Voltage type	AC
Energy Efficiency Index (EEI)	0.146
Total harmonic distortion	135