




Scandic LED Spot L

3XGU10 BK

Spotlight

Scandic Spot L includes three shades for which you can choose your favorite GU10 LED bulbs from Airam's versatile range. A modern spotlight that is suitable for Scandinavian interior design. Available in either white or black. You can adjust the direction of the light by turning the shade. The light is easy to mount directly onto the ceiling or into a junction box. The Scandic range of light fixtures also includes the Scandic Spot S light.

Scandic Spot L Spotlight No dim; IP20; Protection cl. I; 3xLED GU10, not incl.; Ending; Housing Steel; Colour bk; Cover None

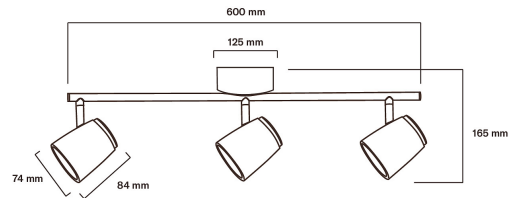

3XGU10 BK

PRODUCT CODE	CODE	KG	PRODUCT FAMILY
9610577		0.75	Scandic LED Spot L

Mounting	
Suitable for surface mounting	Yes
Suitable for recessed mounting	No
Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Suitable for ceiling mounting	Yes
Suitable for traverse mounting	No
Suitable for pedestal/floor mounting	No
Suitable for light-track mounting	No
Suitable for clamp-mounting	No
Suitable for low voltage cable system	No
Degree of protection (IP)	IP20
Type of wiring	Ending
Number of poles	3
Connection type	Screwless terminal
Luminaire with limited surface temperature, class "D" in acc. with EN 60598-2-24	No
Fit for workplace acc. EN 12464-1	No
Structure	
Adjustability	Rotating and swivelling
Lamp type	LED exchangeable
Light source included	No
Suitable for number of lamps	3
Lamp holder	GU10
Housing material	Steel
Surface protection	Powder coating
Housing colour	Black
Cover material	None
Surface brushed	No
Control gear included	No
Exchangeable control gear	No
Reflector	None
Energy efficiency class of light source according to EU regulation 2019/2015	Not required
Emergency power supply integrated	No
Filament test according to IEC 60695-2-11	None

Dimming and control	
With movement sensor	No
With light sensor	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI-2	No
Dimming DALI	No
Dimming DMX	No
Dimming DSI	No
Dimming potentiometer (integrated)	No
Dimming LineSwitch	No
Dimming manufacturer's proprietary system	No
Dimming mains voltage modulation	No
Dimming trailing edge	No
Dimming leading edge	No
Dimming programmable	No
Dimming RF	No
Dimming Sine Wave Reduction	No
Dimming Touch and Dim	No
Dimming Zigbee	No
Dimming with push-button	No
No dimming function	Yes
Constant luminous flux control	No
IFTTT support available	No
Compatible with Apple HomeKit	No
Bluetooth operated	No
Compatible with Google Assistant	No
Compatible with Amazon Alexa	No
Photometric data	
Light distributor	None
Light sharing	Symmetric
Light outlet	Direct
Colour temperature switchable	No
Lumen setting adjustable	No
Beam angle adjustable	No
Lifetime and capacity	
Rated ambient temperature acc. IEC62722-2-1 (min) [°C]	0
Rated ambient temperature acc. IEC62722-2-1 (max) [°C]	25
Measurements	
Length (mm)	125
Width (mm)	600
Height/depth (mm)	165
Electrotechnical data	
Voltage type	AC
Nominal voltage (min) [V]	220
Nominal voltage (max) [V]	240
Type of control gear	Not required
Protection class according to IEC 61140	I
Suitable for lamp power (min) [W]	1
Suitable for lamp power (max) [W]	9