

IP20




Cabilink

3CCT 220-240V 5W 380mm

Extendable Under-Cabinet Light

CabiLink is a low-profile and space-saving lighting system suitable for many applications, such as under kitchen cabinets. Light modules are available in three lengths and can be linked together using the included connector cable and plug. The cable enables corner installations, while the plug is ideal for long, straight runs. The total lighting system can be extended up to 7 meters! The color temperature is adjustable via a switch on the side of the luminaire. Easy installation with small clips and screws or double-sided tape. Mounting accessories are included in the package.

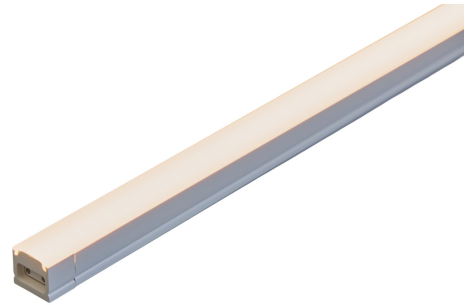

3CCT 220-240V 5W 380mm

| PRODUCT CODE | CODE | KG | PRODUCT FAMILY |
|--------------|------|-------|----------------|
| 9610725 | | 0.078 | Cabilink |

3CCT 220-240V 5W 380mm
EC002892

| Mounting | |
|---------------------------------------|------|
| Suitable for wall mounting | No |
| Suitable for suspended mounting | No |
| Suitable for ceiling mounting | Yes |
| Suitable for recessed mounting | No |
| Suitable for surface mounting | Yes |
| Suitable for light line configuration | No |
| Suitable for clamp-mounting | Yes |
| Fit for workplace acc. EN 12464-1 | No |
| Degree of protection (IP) | IP20 |
| Degree of protection (IP), rear side | IP20 |
| Impact strength | IK04 |

| Structure | |
|--|----------------------|
| With mounting material | Yes |
| Lamp type | LED not exchangeable |
| Light source included | Yes |
| Housing material | Plastic |
| Housing surface protection | Untreated |
| Housing colour | White |
| Cover material | Plastic, opal |
| Control gear included | Yes |
| Exchangeable control gear | No |
| Energy efficiency class of light source according to EU regulation 2019/2015 | F |
| Containing product according to 2019/2020/EU | No |
| With switch | Yes |

| Dimming and control | |
|---------------------|-----|
| Dimmable | No |
| No dimming function | Yes |

| Photometric data | |
|---|---------------------------|
| Light distributor | Diffuser lens/optic/panel |
| Light sharing | Symmetric |
| Beam angle | Extreme wide beam >80° |
| Light outlet | Direct |
| Rated luminous flux according to IEC 62722-2-1 (min) (lm) | 450 |
| Rated luminous flux according to IEC 62722-2-1 (max) (lm) | 490 |
| Effective luminous flux (lm) | 450 |
| Colour temperature (min) (K) | 2700 |
| Colour temperature (max) (K) | 4000 |
| Colour rendering index (CRI/Ra) | 80-89 |
| Colour temperature switchable | Discrete positions |
| Lumen setting adjustable | No |
| Beam angle adjustable | No |

| Lifetime and capacity | |
|--------------------------------------|-------|
| Rated life time L70/B50 at 25 °C (h) | 30000 |
| Rated life time L80/B50 at 25 °C | 20000 |

| Measurements | |
|--------------|-----|
| Length (mm) | 380 |

| Electrotechnical data | |
|---------------------------------|---|
| Voltage type | AC |
| Nominal voltage (min) (V) | 220 |
| Nominal voltage (max) (V) | 240 |
| Nominal current (min) (mA) | 20 |
| Nominal current (max) (mA) | 22 |
| Type of control gear | LED operating device current-controlled |
| Luminaire efficacy (min) (lm/W) | 90 |
| Luminaire efficacy (max) (lm/W) | 100 |
| Maximum system power (W) | 5 |
| Luminaire efficacy (lm/W) | 90 |