

IP20


IK04

Cabilink

3CCT 220-240V 7.5W 580mm

Extendable Under-Cabinet Light

CabiLink is a low-profile and space-saving lighting system suitable for many applications, such as under kitchen cabinets. Light modules are available in three lengths and can be linked together using the included connector cable and plug. The cable enables corner installations, while the plug is ideal for long, straight runs. The total lighting system can be extended up to 7 meters! The color temperature is adjustable via a switch on the side of the luminaire. Easy installation with small clips and screws or double-sided tape. Mounting accessories are included in the package.

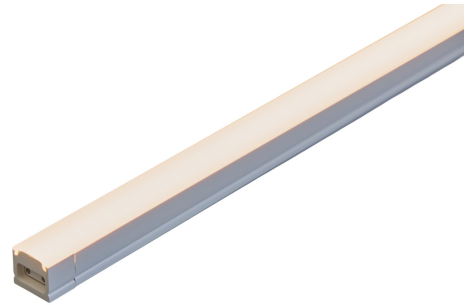

3CCT 220-240V 7.5W 580mm

PRODUCT CODE	CODE	KG	PRODUCT FAMILY
9610726		0.115	Cabilink

Mounting	
Suitable for wall mounting	No
Suitable for suspended mounting	No
Suitable for ceiling mounting	Yes
Suitable for recessed mounting	No
Suitable for surface mounting	Yes
Suitable for light line configuration	No
Suitable for clamp-mounting	Yes
Fit for workplace acc. EN 12464-1	No
Degree of protection (IP)	IP20
Degree of protection (IP), rear side	IP20
Impact strength	IK04
Structure	
With mounting material	Yes
Lamp type	LED not exchangeable
Light source included	Yes
Housing material	Plastic
Housing surface protection	Untreated
Housing colour	White
Cover material	Plastic, opal
Control gear included	Yes
Exchangeable control gear	No
Energy efficiency class of light source according to EU regulation 2019/2015	F
Containing product according to 2019/2020/EU	No
With switch	Yes
Dimming and control	
Dimmable	No
No dimming function	Yes
Photometric data	
Light distributor	Diffuser lens/optic/panel
Light sharing	Symmetric
Beam angle	Extreme wide beam >80°
Light outlet	Direct
Rated luminous flux according to IEC 62722-2-1 (min) (lm)	700
Rated luminous flux according to IEC 62722-2-1 (max) (lm)	760
Effective luminous flux (lm)	450
Colour temperature (min) (K)	2700
Colour temperature (max) (K)	4000
Colour rendering index (CRI/Ra)	80-89
Colour temperature switchable	Discrete positions
Lumen setting adjustable	No
Beam angle adjustable	No
Lifetime and capacity	
Rated life time L70/B50 at 25 °C (h)	30000
Rated life time L80/B50 at 25 °C	20000
Measurements	
Length (mm)	580

Electrotechnical data	
Voltage type	AC
Nominal voltage (min) (V)	220
Nominal voltage (max) (V)	240
Nominal current (min) (mA)	20
Nominal current (max) (mA)	22
Type of control gear	LED operating device current-controlled
Luminaire efficacy (min) (lm/W)	90
Luminaire efficacy (max) (lm/W)	100
Maximum system power (W)	7.5
Luminaire efficacy (lm/W)	90