




Tulip

16W/940 780lm

Tulip Botanical luminaire 16W 4000K 780lm Dim
Touch and Dim; Protection cl. II; L70B50 25000h; LED
not exchangeable; CRI>90; Housing Plastic; Colour
wh; Cover Plastic, opal

16W/940 780lm			
PRODUCT CODE	CODE	KG	PRODUCT FAMILY
9610539	A7GANX	0.6	Tulip

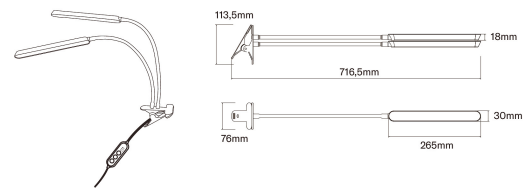

16W/940 780lm

EC000302

Mounting	
Type of luminaire	Desk luminaire
Mounting method	Clamping
Suitable for wall mounting	No
Fit for workplace acc. EN 12464-1	No
Electrical connection with connector system	No

Structure	
Adjustable	Yes
Bendable	Yes
Adjustable height	Yes
Lamp type	LED not exchangeable
With lamp	Yes
Suitable for number of lamps	1
Lamp holder	None
Housing material	Plastic
Housing colour	White
Cover material	Plastic, opal
Exchangeable control gear	No
With switch	Yes
With socket outlet	No
Energy efficiency class of light source according to EU regulation 2019/2015	Not required

Dimming and control	
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming DMX	No
Dimming DSI	No
Dimming potentiometer (integrated)	No
Dimming LineSwitch	No
Dimming manufacturer's proprietary system	No
Dimming mains voltage modulation	No
Dimming phase cut-off	No
Dimming phase cut-on	No
Dimming programmable	No
Dimming RF	No
Dimming Sine Wave Reduction	No
Dimming Touch and Dim	Yes
Dimming Zigbee	No
Dimming with push-button	No
No dimming function	No
With dimmer	Yes
Bluetooth operated	No
Compatible with Apple HomeKit	No
Compatible with Google Assistant	No
Compatible with Amazon Alexa	No
Compatible with Casambi	No
IFTTT support available	No

Photometric data	
Effective luminous flux (lm)	780
Photobiological safety according to EN 62471	RG0
Colour of light (alphanumeric)	White
Colour temperature (min) (K)	4000
Colour temperature (max) (K)	4000
Colour rendering index CRI	90-100
Colour temperature switchable	No
Lumen setting adjustable	Positions
Beam angle adjustable	Positions

Lifetime and capacity	
Rated life time L70/B50 at 25 °C (h)	25000

Measurements	
Width (mm)	113.5
Height/depth (mm)	716.5
Length (mm)	716.5

Electrotechnical data	
Voltage type	AC/DC
Nominal voltage (min) (V)	100
Nominal voltage (max) (V)	240
Type of control gear	Not required
Protection class	III
Suitable for lamp power (min) (W)	16
Suitable for lamp power (max) (W)	16
Maximum system power (W)	16
Luminaire efficacy (lm/W)	49
Power factor	0.5